


Rohrkabelschuhe 0,5 – 25 mm², Euro-Serie

Werkstoff: Cu gemäß DIN EN 13600

Oberfläche: galvanisch verzinkt – Ausführung: ohne Sichtloch, wahlweise mit Sichtloch

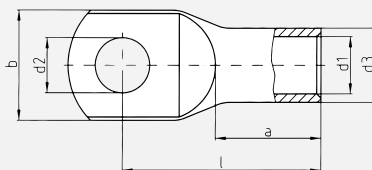

4


Querschnitt mm ²	Bohrung M	Best.-Nr. o. Sichtloch	Maße in mm						Gewicht 100 Stk./kg	Verpackungs- Einheit (Stk.)	Best.-Nr. m. Sichtloch	Werkzeuge hierzu
d1	d3	d2	b	l	a							
0,5 – 0,75	3	13000*	1,4	3	3,2	6,5	12,5	6	0,07	100	–	WZ 21 126
	4	13001*			4,3	8,5	14		0,08	100	–	
	5	13002*			5,3	10	15		0,10	100	–	
1,0 – 1,5	3	13005*	1,9	3,9	3,2	6,5	14	6	0,12	100	–	WZ 21 126
	4	13006*			4,3	8,5	15		0,14	100	–	
	5	13007*			5,3	10	16		0,15	100	–	
	6	13008*			6,4	11	18		0,17	100	–	
2,5	4	13010*	2,4	4,4	4,3	8,5	15	6,5	0,16	100	–	WZ 21 126
	5	13011*			5,3	10	16		0,18	100	–	
	6	13012*			6,4	11	18		0,19	100	–	
	8	13013*			8,4	13	20		0,22	100	–	
4	4	13015*	3	5	4,3	8,5	17	8	0,22	100	–	WZ 21 126
	5	13016*			5,3	10	18		0,24	100	–	
	6	13017*			6,4	11	20		0,26	100	–	
	8	13018*			8,4	14	22		0,30	100	–	
6	4	16020	3,5	6,5	4,3	10	19	9	0,46	100	15215	WW 6/70 151
	5	16021			5,3	10	20		0,47	100	15216	
	6	16022			6,4	11	21,5		0,54	100	15217	
	8	16023			8,4	15	24		0,59	100	15218	
	10	16024			10,5	18	26		0,64	100	15219	
	12	16025			13	19	27,5		0,64	100	15220	
10	4	15204	4,5	7	4,3	12	20	10	0,46	100	15221	WW 10/120 152
	5	15205			5,3	12	21		0,48	100	15222	
	6	15206			6,4	12	22,5		0,52	100	15223	
	8	15207			8,4	15	25		0,58	100	15224	
	10	15208			10,5	18	27		0,63	100	15225	
	12	15209			13	20	28,5		0,67	100	15226	
16	4	15299	5,5	8,5	4,3	12	24	13	0,82	100	15227	WW 10/120 152
	5	15210			5,3	12	25		0,89	100	15228	
	6	15211			6,4	12	26,5		0,96	100	15229	
	8	15212			8,4	15	29		1,03	100	15230	
	10	15213			10,5	18	31		1,10	100	15231	
	12	15214			13	19	32		1,08	100	15232	
25	5	16296	7	10	5,3	15	33,5	15	1,52	100	15234	WW 10/120 152
	6	16215			6,4	15	31,5		1,31	100	15235	
	8	16216			8,4	16	33		1,29	100	15236	
	10	16217			10,5	18	34,5		1,46	100	15237	
	12	16218			13	20	36		1,56	100	15238	
	14	16219			15	22	39		1,66	100	15239	
	16	16295			17	24	42		1,73	100	15240	

* nicht UL-geprüft

Rohrkabelschuhe 35 – 120 mm², Euro-Serie

Werkstoff: Cu gemäß DIN EN 13600

Oberfläche: galvanisch verzinkt – Ausführung: ohne Sichtloch, wahlweise mit Sichtloch

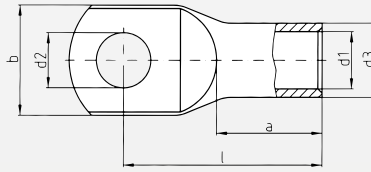


Querschnitt mm ²	Bohrung M	Best.-Nr. o. Sichtloch	Maße in mm						Gewicht 100 Stk./kg	Verpackungs- Einheit (Stk.)	Best.-Nr. m. Sichtloch	Werkzeuge hierzu
35	6	16220	8,5	12	6,4	17	33	17	2,07	100	15241	WW 6/70 151 WW 10/120 152 AP 10 165, HHW 10 + HPW 10 157, APW 20 160, HHW 20 + HPW 20 161, Stilo 20 160 APW 30 + HHW 30 164, APW 35 + HHW 35 165, HPW 15 165, HPW 17 164, Stilo 1 154
	8	16221			8,4	17	34		2,18	100	15242	
	10	16222			10,5	20	36,5		2,19	100	15243	
	12	16223			13	22	37,5		2,24	100	15244	
	14	16281			15	23	40		2,44	100	15245	
	16	16292			17	28	44		2,60	100	15246	
50	6	16224	10	14	6,4	20	37	19	3,01	100	15248	
	8	16225			8,4	20	39		3,05	100	15249	
	10	16226			10,5	20	40,5		3,13	100	15250	
	12	16227			13	23	42		3,22	100	15251	
	14	16282			15	23	44		3,51	100	15252	
	16	16228			17	27	46		3,55	100	15253	
	20	16297			21	30,5	52,5		3,94	100	15254	
70	6	16229	12	16,5	6,4	24	40,5	21	4,11	25	15256	
	8	16230			8,4	24	42,5		4,69	25	15257	
	10	16231			10,5	24	43,5		4,66	25	15258	
	12	16232			13	24	45		4,83	25	15259	
	14	16283			15	25	46		4,91	25	15260	
	16	16233			17	28	48,5		4,96	25	15261	
	20	16234			21	29	52		5,29	25	15262	
95	6	16290	13,5	18	6,4	26	43	23	4,95	25	15263	
	8	16235			8,4	26	46		5,36	25	15264	
	10	16236			10,5	26	47		5,56	25	15265	
	12	16237			13	26	48		5,51	25	15266	
	14	16284			15	26	51,5		5,89	25	15267	
	16	16238			17	28	51		5,85	25	15268	
	20	16239			21	30	55		6,24	25	15269	
120	8	16285	15	20	8,4	29	49,5	26	7,33	25	15271	
	10	16240			10,5	29	52		7,99	25	15272	
	12	16241			13	29	51,5		8,35	25	15273	
	14	16286			15	30	53		8,14	25	15274	
	16	16242			17	30	55		8,07	25	15275	
	20	16243			21	35	60		8,90	25	15276	

Rohrkabelschuhe 150 – 630 mm², Euro-Serie

Werkstoff: Cu gemäß DIN EN 13600

Oberfläche: galvanisch verzinkt – Ausführung: ohne Sichtloch, wahlweise mit Sichtloch

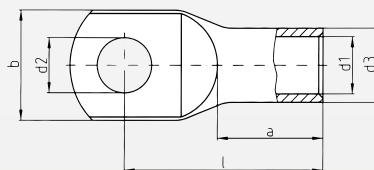

4

Querschnitt mm ²	Bohrung M	Best.-Nr. o. Sichtloch	Maße in mm						Gewicht 100 Stk./kg	Verpackungs- Einheit (Stk.)	Best.-Nr. m. Sichtloch	Werkzeuge hierzu
150	8	16244	16,8	21,3	8,4	31	55,5	29	7,89	25	15278	Stilo 1 154
	10	16245			10,5	31	56,5		8,37	25	15279	
	12	16246			13	31	56		8,07	25	15280	
	14	16287			15	31	57		8,30	25	15281	
	16	16247			17	31	58		8,36	25	15282	
	20	16248			21	35	63		8,75	25	15283	
185	8	13293*	19	24	8,4	35	58	30	10,37	25	13793*	AP 10 155, HHW 10 + HPW 10 153
	10	13249			10,5	35	59		10,71	25	13749	
	12	13250			13	35	58,5		10,60	25	13750	
	14	13288			15	35	61		10,98	25	13788	
	16	13251			17	35	63		10,86	25	13751	
	20	13252			21	35	66		11,78	25	13752	
240	8	13253*	21	26	8,4	38	67	35	12,40	25	13753	APW 30 + HHW 30 164, HPW 17 164
	10	13254			10,5	38	67		12,97	25	13754	
	12	13255			13	38	67		13,41	25	13755	
	14	13289			15	38	69		13,36	25	13789	
	16	13256			17	38	69,5		13,56	25	13756	
	20	13257			21	38	71		13,80	25	13757	
300	10	13259*	24	30	10,5	44	79,5	42	20,77	20	13759	AP 10 155, HHW 10 + HPW 10 153
	12	13260			13	44	82		21,18	20	13760	
	14	13290			15	44	84		22,19	20	13790	
	16	13261			17	44	85		21,94	20	13761	
	20	13262			21	44	85		22,40	20	13762	
400	10	13263	27,5	33,5	10,5	49	92	47	27,90	15	13763	APW 30 + HHW 30 164, HPW 17 164
	12	13264			13	49	92		27,85	15	13764	
	16	13265			17	49	92		27,65	15	13765	
	20	13266			21	49	92		27,80	15	13766	
500	12	13269*	31	38	13	55,5	113	70	49,38	5	13769*	AP 10 155, HHW 10 + HPW 10 153
	16	13270			17	55,5	113		49,38	5	13770	
	20	13271			21	55,5	113		48,56	5	13771	
630	16	13275*	34	41	17	60	115	70	51,35	5	13775*	APW 30 + HHW 30 164, HPW 17 164
	20	13276*			21	60	115		50,60	5	13776*	

* nicht UL-geprüft