




SES

Material: Messing verzinkt

Gebrauchstemperatur: +200°C max

Anwendung: geeignet für kleine und mittlere Serienarbeiten, Fehlerbehebungen und Reparaturen.

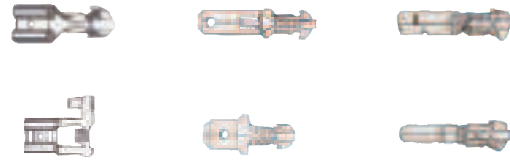

Typ	Art. Nr.	Durchmesser mm²	d3	Abmessungen (mm)			e	
				L1	L2			
Rundsteckhülse, gerade								
EN 6503 F - 2,8	0633 0907 000	0,3 ... 1	2,8	6,2	16	0,5	100	
EN 6300 F - 5-1	0633 0944 000	0,5 ... 1	5	7	16,5	0,8	100	
EN 6303 F - 5-2,5	0633 0945 000	1 ... 2,5	5	7	16,5	0,8	100	
EN 6501 F - 6,3-1	0633 0901 000	0,5 ... 1	6,3	7,5	19	0,8	100	
EN 6500 F - 6,3-2,5	0633 0900 000	1 ... 2,5	6,3	7,8	19	0,8	100	
EN 6502 F - 6,3-6	0633 0943 000	2,5 ... 6	6,3	7,8	20,5	0,8	100	
Rundsteckhülse, rechtwinklig								
EN 3506 FD - 6,3-2,5	0633 0952 000	1 ... 2,5	6,3	7	15	0,8	100	
Flachstecker								
EN 6508 M - 5-2,5	0633 0941 000	1 ... 2,5	5	13,5	24	0,8	100	
Flachstecker								
EN 6509 M - 6,3-2,5	0633 0902 000	1 ... 2,5	6,3	8	19	0,8	100	
Rundsteckhülse								
EN 6005 F - 2,5	0633 0922 000	0,6 ... 2,5	Ø 4	10	20,5	-	100	
Rundstecker								
EN 6010 M - 4	0633 0921 000	1 ... 4	Ø 4	14,3	24	-	100	

