



Product designation

Product type designation

Number of poles

Nr. 1

Contact characteristics

IEC Conventional free air thermal current I_{th}

A 10

Mechanical life

cycles 100000

Mechanical features

Fixing

Side mounting


Tightening torque for terminals

max	Nm	0.8
min	lbin	7.1

Weight

g 30


Dimensions

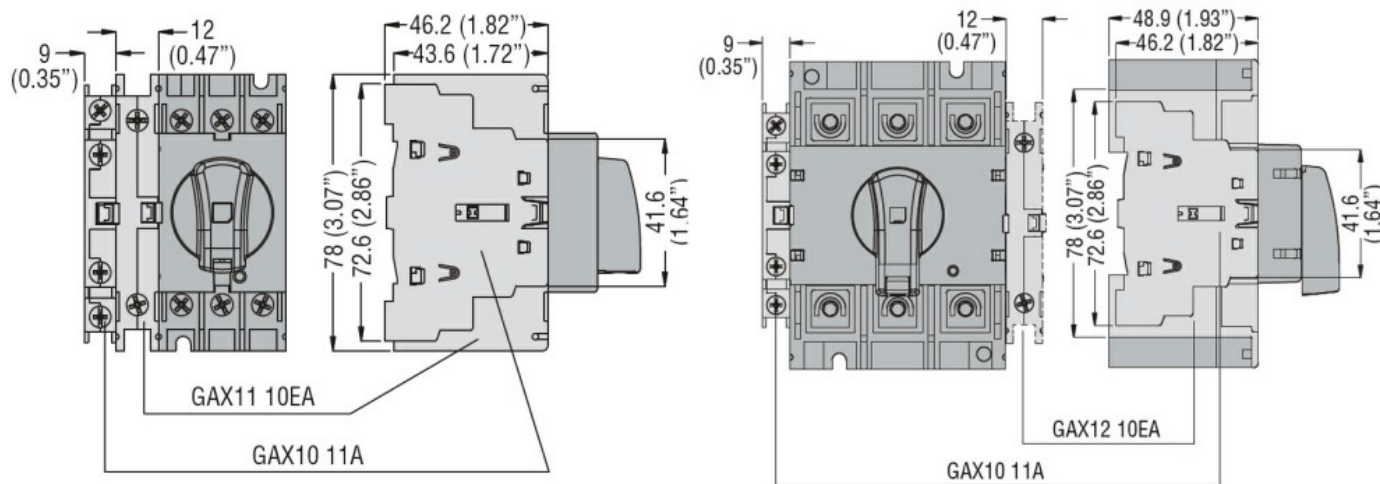

Wiring diagrams

Auxiliary contacts

GAX10...



Certifications and compliance

Compliance

CSA C22.2

TRENNSCHALTER, HILFSKONTAKT MIT GLEICHZEITIGEM SCHLIEßEN IN BEZUG AUF DIE
POLE DES TRENNSCHALTERS, 1S + 1Ö FÜR GA...A UND GA040D

IEC/EN 60947-1

IEC/EN 60947-3

IEC/EN 60947-5-1

UL508

UL98

Certifications

CCC

CSA C22.2 n°14

cULus according to UL508

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block